
BO2SJ–01

REMOVAL

1. w/ Rear spoiler:
REMOVE REAR SPOILER

2. REMOVE DOOR PULL HANDLE

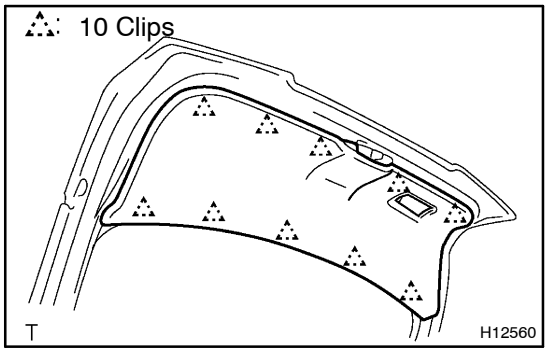


3. REMOVE BACK DOOR TRIM BOARD

Using a screwdriver, remove the back door trim board.

HINT:

Tape the screwdriver tip before use.

4. REMOVE REAR WIPER ARM

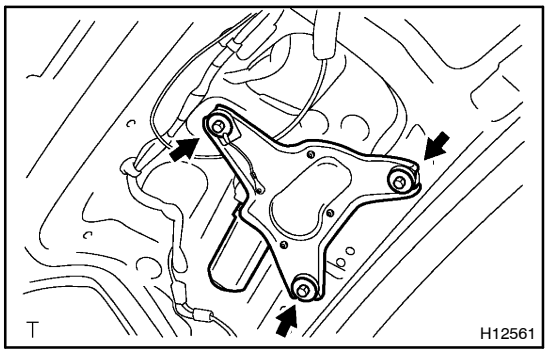


5. REMOVE REAR WIPER MOTOR

(a) Disconnect the connector.

(b) Unfasten the 3 bolts and remove the rear wiper motor.

(c) Remove the packing.


(d) Europe (RHD):
Remove the grommet from the rear wiper motor.

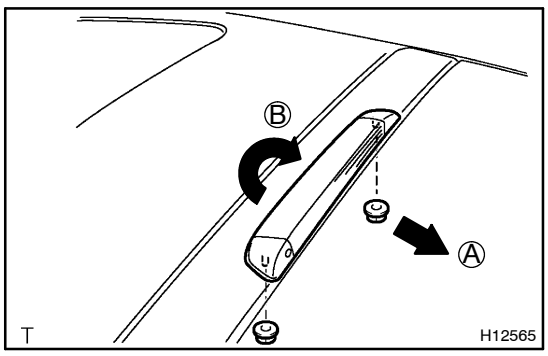

6. REMOVE REAR WASHER NOZZLE

(a) Remove the 2 nuts.

(b) Disconnect the connector and washer hose, then remove the center stop light in order A, B as shown in the illustration.

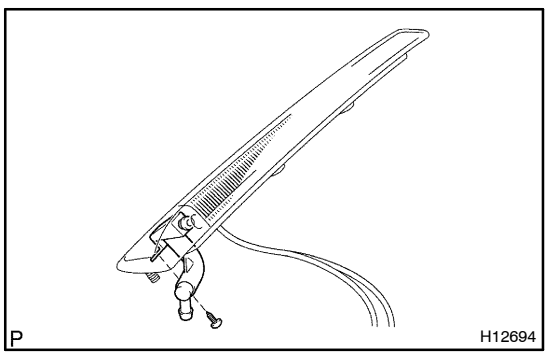

(c) Remove the screw and rear washer nozzle from the center stop light.