
BO2SQ–01

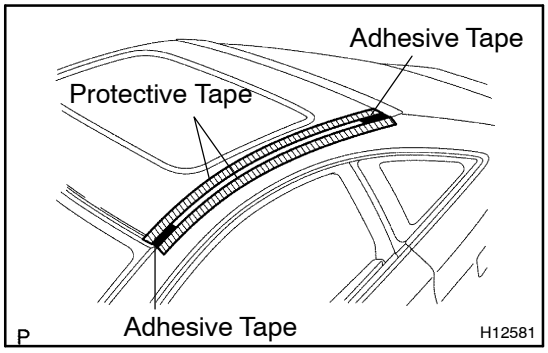

REMOVAL


1. REMOVE ENDS OF MOULDING

(a) Apply protective tape to the outer surface as shown in the illustration to keep the surface from being scratched.

(b) Using a heat light, heat the moulding to 20 – 30 °C (68 – 86 °F).

NOTICE:

Do not heat the moulding excessively.

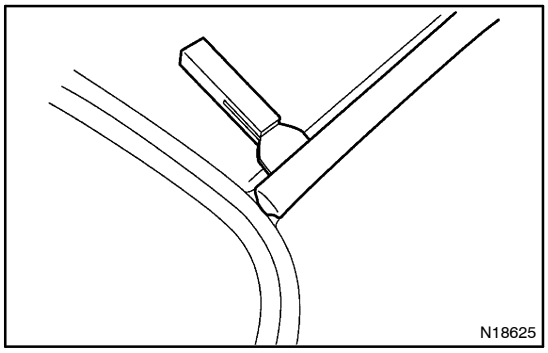

(c) Using a scraper, pull off the roof side moulding from the front end and rear end.

HINT:

Tape the screwdriver tip before use.

2. REMOVE MOULDING AND ADHESIVE

(a) Pull off the moulding by cutting the adhesive with a knife at the front and rear ends.

(b) Remove the moulding.

NOTICE:

Do not damage the body with the knife.