
BO2T0–01

REMOVAL

1. **w/ Rear spoiler:**
   REMOVE REAR SPOILER
2. **REMOVE REAR WIPER ARM**
3. **REMOVE DOOR PULL HANDLE**

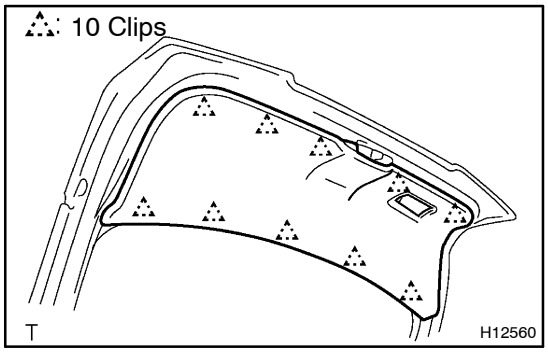


4. REMOVE BACK DOOR TRIM BOARD

Using a screwdriver, remove the back door trim board.

HINT:

Tape the screwdriver tip before use.

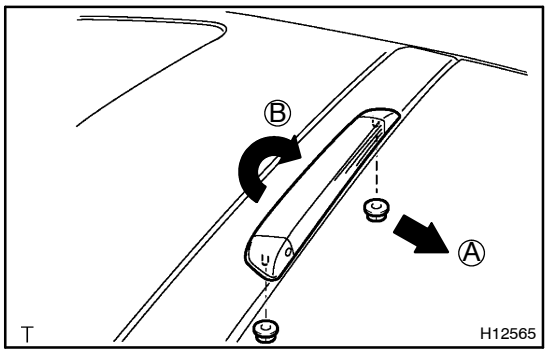


5. REMOVE CENTER STOP LIGHT

(a) Remove the 2 nuts.

(b) Disconnect the connector and washer hose, then remove the center stop light in order A, B as shown in the illustration..

6. REMOVE BACK WINDOW OPENING TRIM

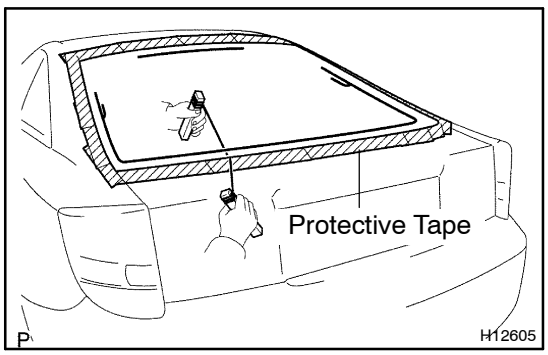

7. REMOVE BACK DOOR GLASS

(a) Insert a piano wire between body and glass and let it pass through.

(b) Tie both wire ends to wooden blocks or similar object.

HINT:

Apply protective tape to the outer surface to keep the surface from being scratched.

NOTICE:

When separating the glass, take care not to damage the paint and exterior.

(c) Cut the adhesive by pulling the piano wire around it.

HINT:

Cut the adhesive areas as shown in the illustration.

