
CL02G–03

REASSEMBLY

1. INSTALL BLEEDER PLUG
Torque: 8.4 N·m (85 kgf·cm, 74 in.·lbf)

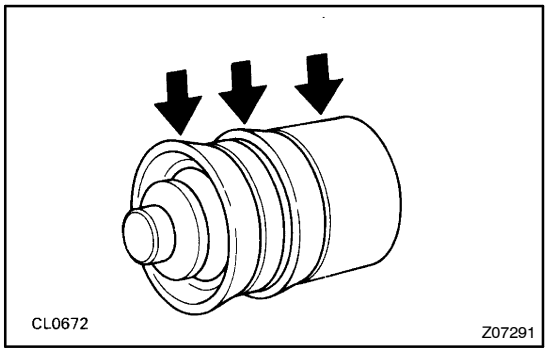

2. COAT PISTON WITH LITHIUM SOAP BASE GLYCOL GREASE, AS SHOWN

3. INSTALL PISTON AND SPRING INTO CYLINDER

4. INSTALL BOOT AND PUSH ROD

(a) Install the push rod to the boot.

(b) Install the boot with the push rod to the cylinder.